



8 7 6 5 4 3 2 1

D D

C C


B B

A A

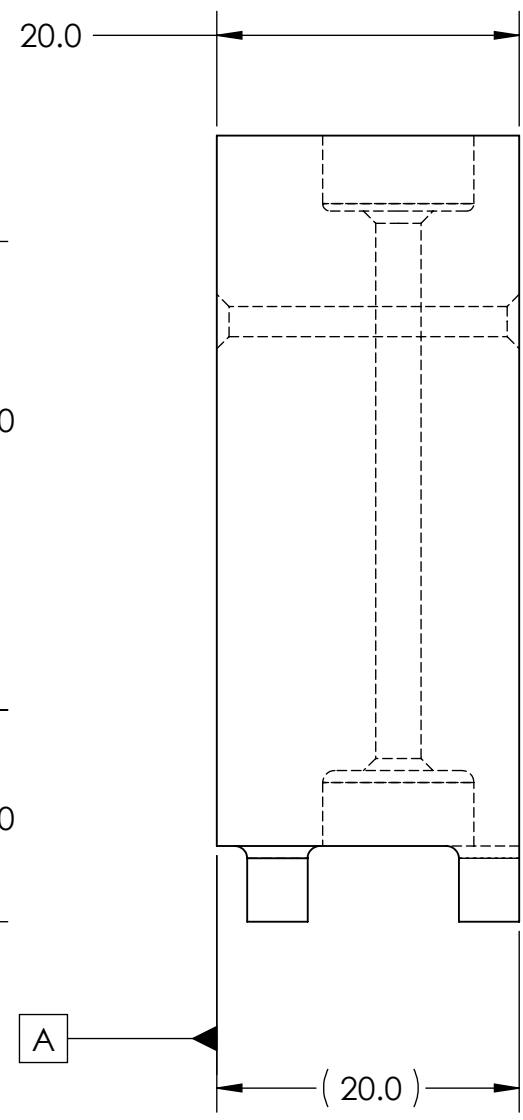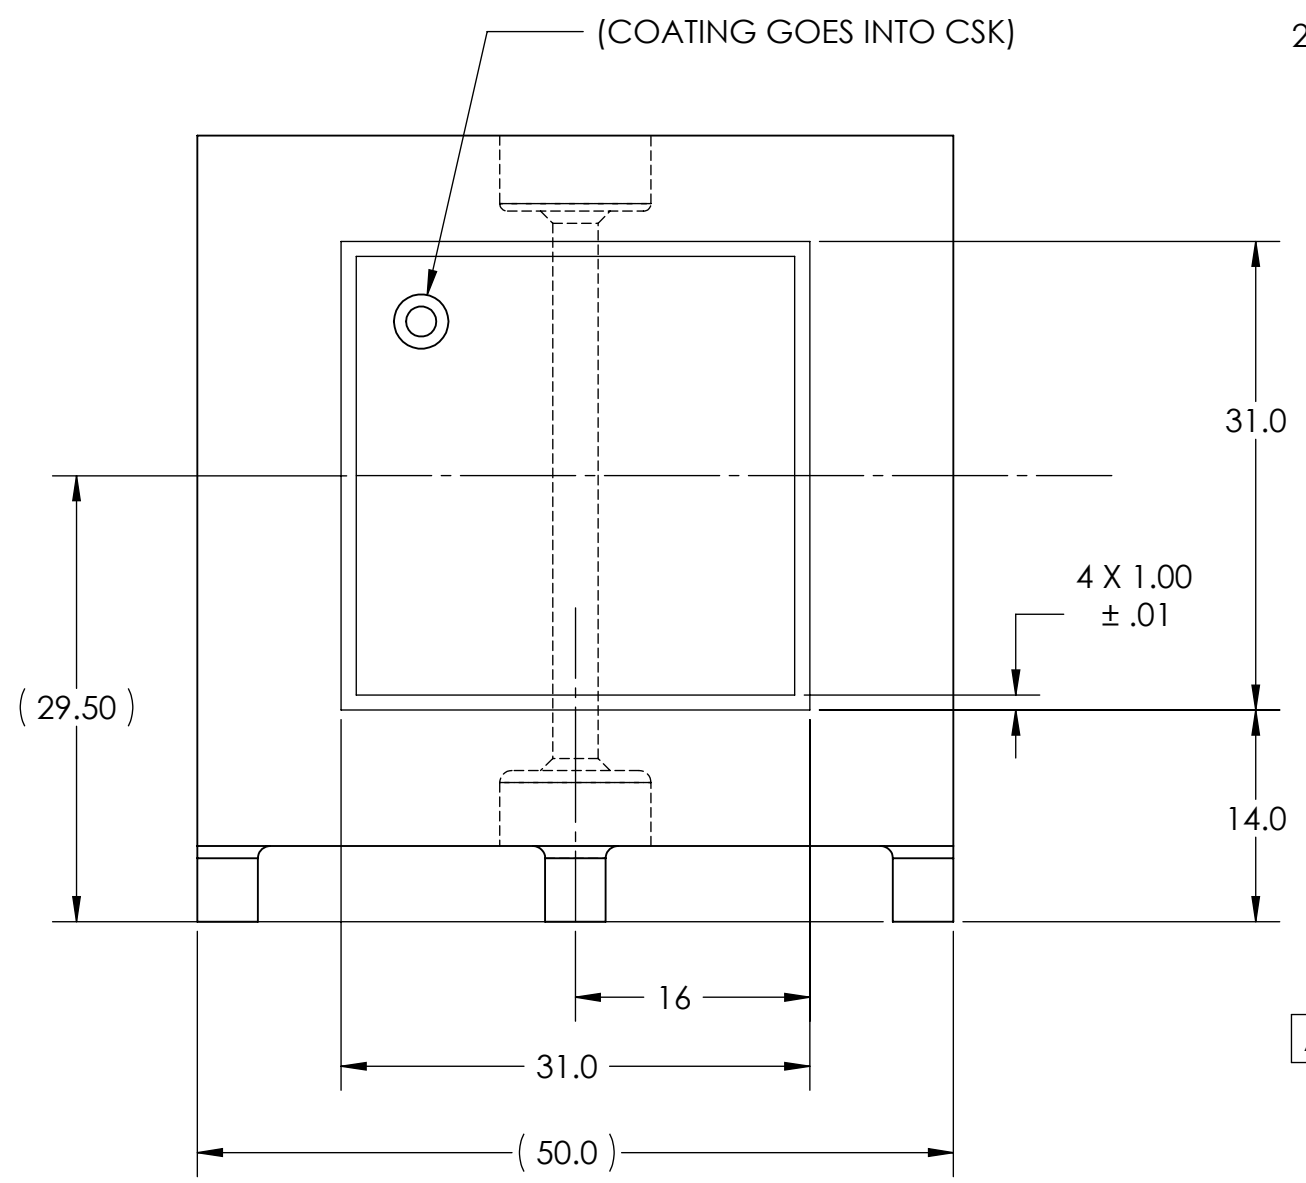

COATING NOTES

1. COATINGS ARE .5 μM GOLD OVER .05 μM CHROMIUM
2. SPUTTERING APPLICATION PREFERRED TO INSUR COATING INSIDE COUNTERSINKS
3. SUBSTRATE TEMPERATURE MAY NOT EXCEED 150 DEG C DURING COATING OR PROCESSING
4. FRONT AND BACK (50 X 45 mm) COATING THICKNESS FACES ± 10%
5. SIDES MAY BE +100%/-50%
6. ETCHED UNCOATED PATTERNS ARE 1 mm WIDE. ETCHED PATTERN SIZE TOLERANCE ± .01 mm
7. ETCHED PATTERN IS LOCATED WITHIN ± 0.1 MM

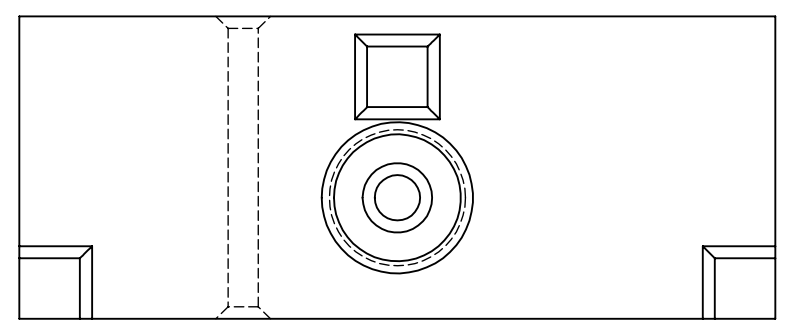

SENSE PADDLE COATING DIMS

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF <INSERT COMPANY NAME HERE>. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF <INSERT COMPANY NAME HERE> IS PROHIBITED.

| | | | | | | |
|---|--|---|--|------------|----------|--|
| <p>METRIC</p> <p>THIRD ANGLE PROJECTION</p> | | UNLESS OTHERWISE SPECIFIED: | | NAME | DATE | <p>TMT Observatory Corporation www.tmt.org</p> |
| | | DIMENSIONS ARE IN MILLIMETERS TOLERANCES: ANGULAR: MACH ± 0.5° TWO PLACE DECIMAL ± 0.8 THREE PLACE DECIMAL ± 0.3 INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5M-1994 | | DRAWN | J MOORE | |
| NEXT ASSY USED ON APPLICATION DO NOT SCALE DRAWING | | MATERIAL FINISH | | CHECKED | | TITLE: <h2>SENSE PADDLE COATING DIMS</h2> |
| | | | | ENG APPR. | | |
| | | | | MFG APPR. | | |
| | | | | Q.A. | | |
| | | | | SIZE | DWG. NO. | REV |
| | | | | B | | |
| | | | | SCALE: 2:1 | WEIGHT: | SHEET 1 OF 1 |

8 7 6 5 4 3 2 1